



TRANSDUCERS

CPQT - Configurable multifunctional transducer / 2 Analog outputs

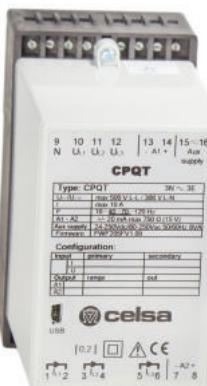

CPQT is a configurable multi transducer for all electrical networks. Any of the parameters can be linked to the 2 analog outputs.

The configuration is simple with the software "ConfigLQT" through the USB port.

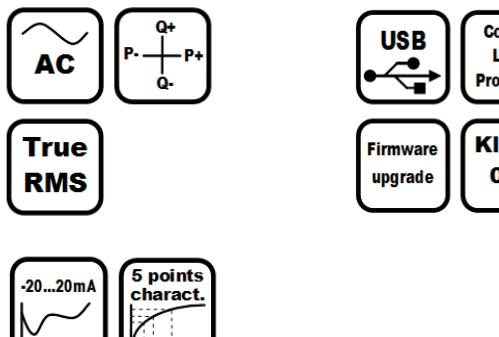

Connections:

9	10	11	12		13	14	15~16
N	U _{L1}	U _{L2}	U _{L3}		- A1 +	Aux supply	

0.2	□	4	✖	CE
1 L ₁ 2	3 L ₂ 4	5 L ₃ 6		- A2 +
				8



Technical Data

Inputs - Voltage	
Input (Un)	100 – 400 V
Overload	1.5 x Un – continuously, 2 x Un – 10 s
Measuring range	0 – 500 V TRMS
Consumption	Un x 1 mA / Phase
Frecuency	10...40....70...120 Hz
Inputs - Current	
Input (In)	1 – 5 A
overload	2 x In continuously, 10 x In 15 s, 40 x In 1 s
Measuring range	0 – 10 A TRMS
Load	<0.05 VA / Phase
Aux. supply	
Universal current	24 – 250 VDC / 80 – 250 VAC
Consumption	max 8 W
Outputs - Analog	
Analog outputs	2
Range	+/- 20 mA, Option: +/- 10 V
Load	max 750 ohm (15V)
Response time	< 100 ms
General Data	
Accuracy class	0,2
Galvanic isolation	Supply, in- and output are galvanically isolated
USB	1 pc for configuration
Temperature range	Operation: -10 to +55 C° Storage: -40 to +70 C°
Temperature coefficient	< 0.1% / 10 C°
Test voltage	4 kV AC / min
Inputs	Overshoot cat. III
Outputs	Overshoot cat. II
Dimensions (w x h x d)	70 x 132 x 137 mm – DIN-rail
Weight	approx. 0.5 kg
Standard	SS-EN 60688 SS-EN 601010 EN 61000-6-2 / -6-4 / -6-5